

PLAN

AES bed extension
- if required.

AES offset adapter /
end cap.

100 inlet @ 1:100 min.
fall from septic tank.

Low level air inlet vent
to be at least 3m lower
than high vent - **refer
to vent notes.**

Raised connector.

AES system sand.

High level air outlet
vent to be at least 3m
higher than low vent -
refer to vent notes.

Low level air inlet vent
(beyond) to be at least
3m lower than high
vent - **refer to vent
notes.**

LONG
SECTION

Extend topsoil mound
1m past AES bed /
extension excavation.

Reinstated backfill.

Outlet @ 1:100 min.
fall back toward AES
bed.

AES offset adapter /
end cap.

AES system sand.

AES bed extension
- if required.


CROSS
SECTION A:A

High level air outlet vent
(beyond) to be at least 3m
higher than low vent - **refer
to vent notes.**

AES system sand.

Reinstated backfill.

AES bed extension
- if required.

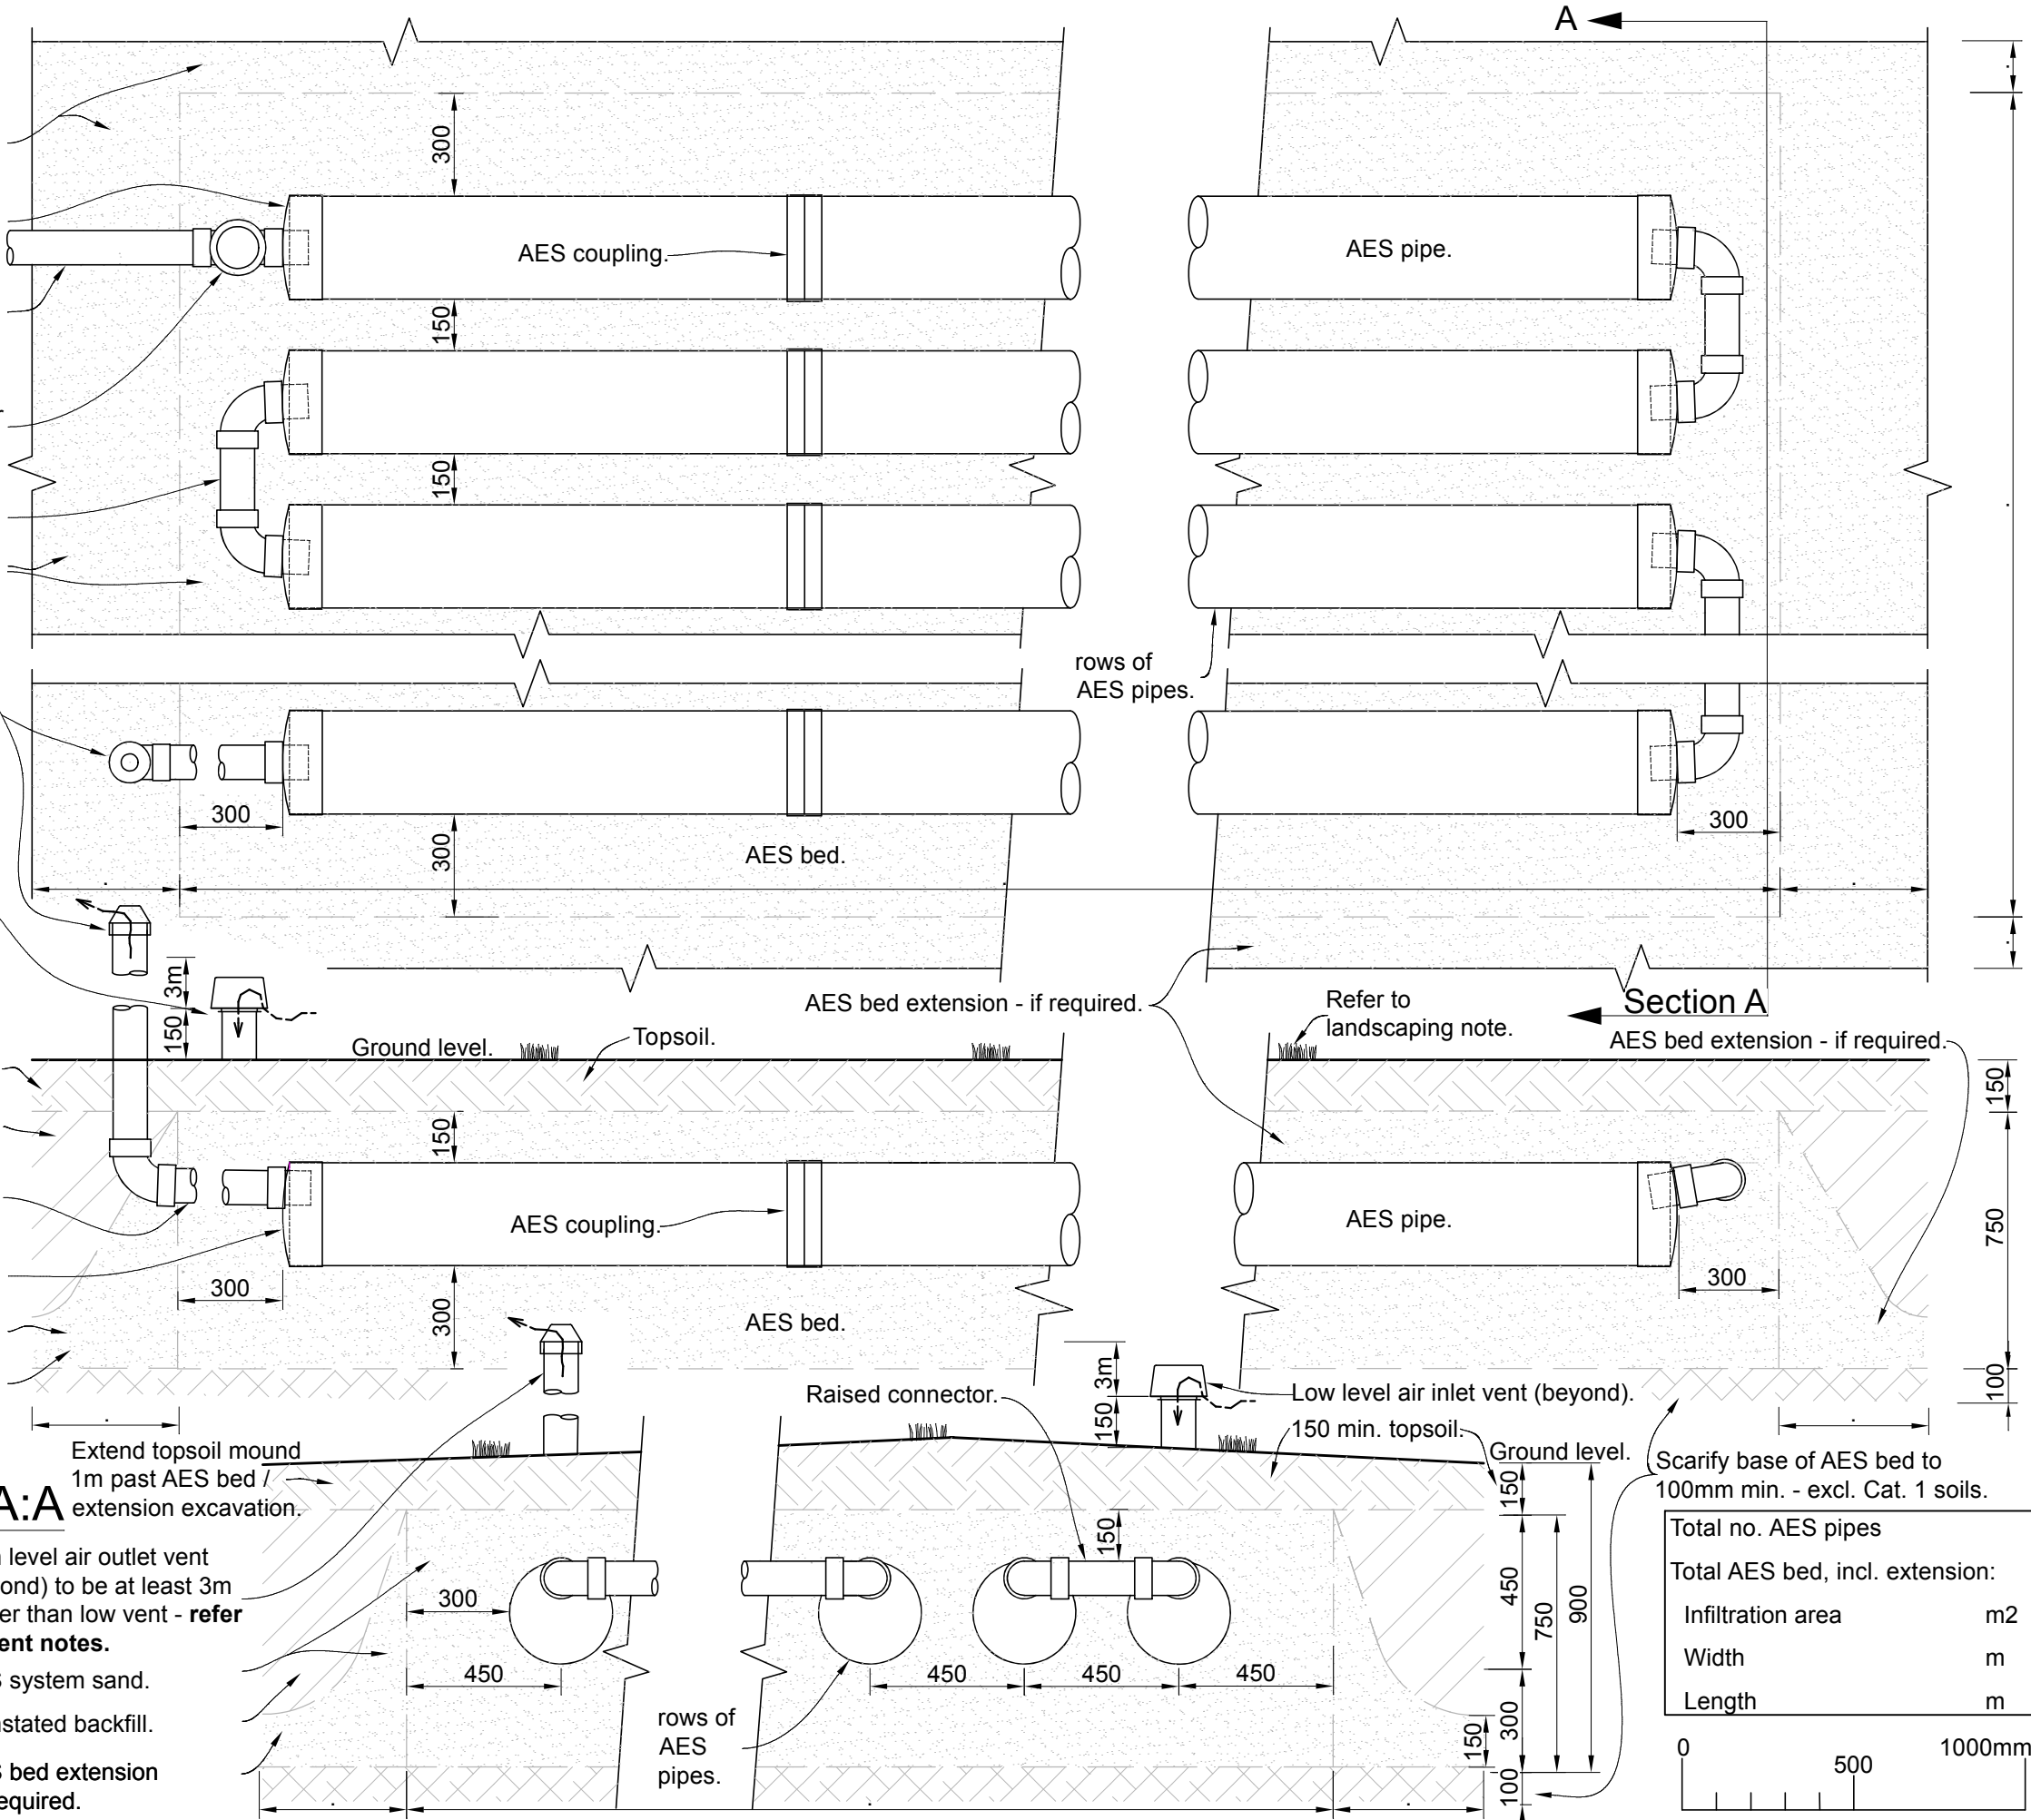

NOTES

General

- Advanced Enviro-Septic (AES) pipes, fittings and bed to be constructed/installed in accordance with the AES Installation Manual.
- AES pipes and fittings are supplied by Environment Technology Ltd, Et.
- All associated pipework to comply with NZ Building Code G13, Foul Water, Acceptable Solutions, relevant standards and local/regional council requirements.
- Unless otherwise stated all dimensions are in millimetres and all dimensions are minimums except pipe diameters and fittings.

Venting of AES Pipework to Maintain Aerobic Internal Conditions

- The high level air exhaust vent to be 100, 80, or 65mm diameter DWV pipe, suitably supported on an adjacent building or post, to be 3m vertically elevated above the air entry vent. 2 x 50mm DWV pipe can be used in internal building framing. Support to be provided to 1 meter below the top of the DWV vent pipe.
- The low level air entry vent to be 100mm DWV, positioned as close as practical to the AES bed and isolated with respect to air passage wherever practical from upstream influent pipework. Refer to the specific design of each project.
- The location of air entry and exit vents can be remote from the AES bed with additional pipework to suit topography, building structures or landscaping. Air exit vents should be positioned considering potential downdrafts or adjacent disturbed air flows.

AES Bed Construction

- An areal extension to the AES bed may be required to suit the permeability of the receiving soil in passive installations. These extensions may be on any or all sides of the bed. Refer to the AES bed dimensions noted on the specific design. N/A or not applicable denotes an extension is not required in this design.
- A minimum of 50mm of fall is required between the septic tank outlet invert and the invert of the inlet to the AES bed or distribution box.
- Trees/large shrubs cannot be planted on the AES bed.
- AES bed 'System Sand' specification is usually met with within the local concrete sand specification. Refer ET website www.et.nz/system-sand-suppliers/ for Et tested AES System Sand suppliers. Et offers cost free sand sieve analysis upon receipt of a two cupful size sample.